


## INSTALLATION INSTRUCTIONS

The following procedure is recommended:

1. Install the AutoSmartIRt/c as close as practical to view the target material to be measured.
2. Wire the AutoSmartIRt/c to the controller, PLC, etc. in standard fashion (see PINOUT and WIRING DIAGRAM)
3. Bring the process up to normal operating temperature and measure the actual temperature of the target material with the Microscanner D-Series, Infrared Thermometer or any other reliable reference.
4. If using a PID controller: adjust "input offset," "zero", "low cal," on the readout device to match the reading of your reference.
5. Installation Complete. (For OEM installations preset the same adjustments. Individual calibration is not required.)

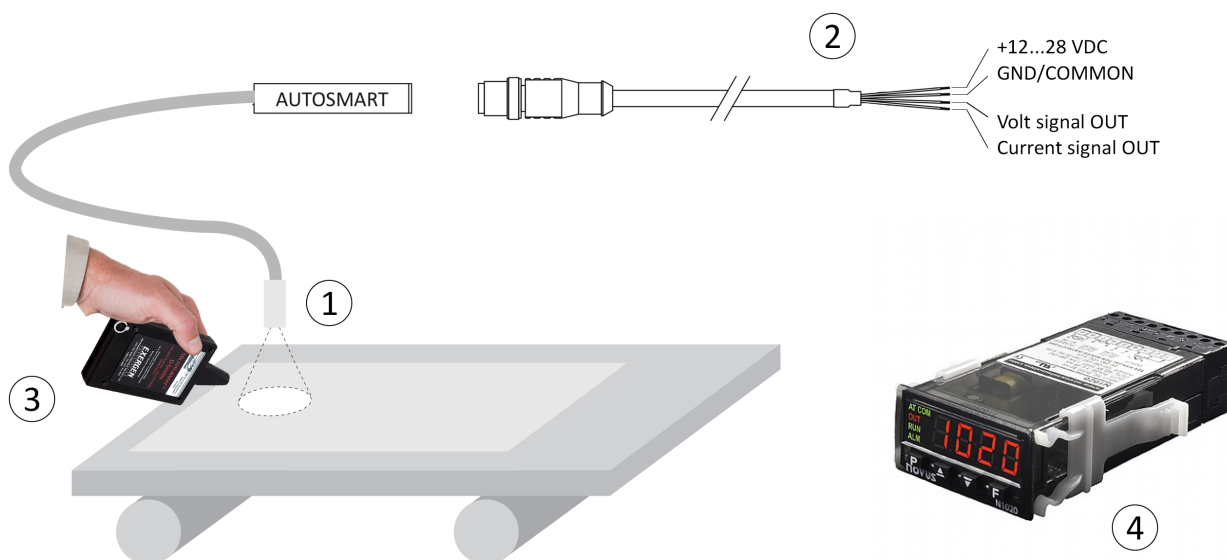

## WIRING DIAGRAM

PINOUT					
Pin	Color	Function			
1	Brown	+12...28 VDC			
2	Blue	GND/Common			
3	Black	Volt signal OUT			
4	White	Current signal OUT			

Exergen Global offices:

The Netherlands  
 Pastoor Clercxstraat 26  
 5465 RH Veghel  
 Tel: +31 (0)413 376 599  
 Fax: +31 (0)413 379 310

USA  
 400 Pleasant Street  
 Watertown, MA 02472  
 Tel: +1 617 649 6322  
 Fax: +1 617 923 9911

office@exergenglobal.com  
 www.exergenglobal.com

MA-2020-02-EN-V0

## TECHNICAL SPECIFICATIONS

### Temperature

Measuring range	Freely scalable - depending on the used IRt/c
Accuracy (typical)	up to $\pm 0,3$ °C - depending on reference
Resolution	0.01 °C
Nonlinearity	< 0,5 % (typical)
Hysteresis	$\pm 1$ % total measuring range
Repeatability	$\pm 0.01$ % °C
Reaction time	Depending on the used IRt/c

### Power supply



Supply voltage	28V max. DC regulated
Current consumption	< 30 mA
Reverse polarity protection	Yes

### Outputs

Current output	4 ... 20mA / 0...20mA
Voltage output	0...10V / 0...5V, 0...2,5V / 0...1V
Operating system	Win 7, Win 8, Win 10

Connector: Female connector M12 4-pin A-coded

## TRANSMITTER DIMENSIONS

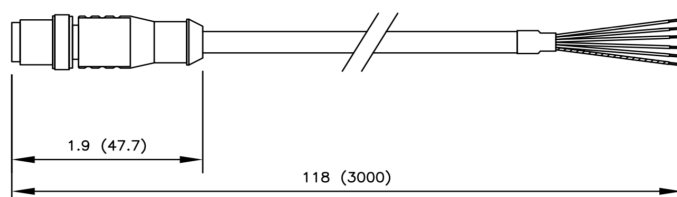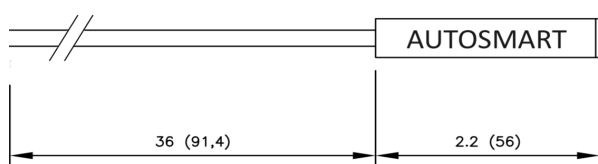

### Exergen Global offices:

The Netherlands  
Pastoor Clercxstraat 26  
5465 RH Veghel  
Tel: +31 (0)413 376 599  
Fax: +31 (0)413 379 310

USA  
400 Pleasant Street  
Watertown, MA 02472  
Tel: +1 617 649 6322  
Fax: +1 617 923 9911

office@exergenglobal.com  
www.exergenglobal.com

MA-2020-02-EN-V0